

WE GO THE DISTANCE FOR YOU



Dry Contact Relay Box for Track & Sprint Series

UPS Product Information

The External AS-400 Relay Module converts UPS communication signals to potential-free, dry contacts for industrial control. It is designed for use with Marathon Power's Track and Sprint Series UPS. Dry contact signals and connection details for the terminal block are as follows:

Terminal Block, Layout and Operation


+UPS State		External Input	DCB LED Display			Terminal Blocks			
AC Failure	BAT Low	S.D.	Yellow	Green	Red	1-2 PIN	2-3 PIN	4-5 PIN	5-6 PIN
Close	Close	Disable	Off	Off	Off	Close	Open	Close	Open
Open	Close	Disable	On	Off	Off	Open	Close	Close	Open
Open	Open	Disable	Off	On	Off	Open	Close	Open	Close
Close	Close	Enable	Off	Off	On	Close	Open	Close	Open

Note 1: Suitable wire size = AWG 22~12 (IEC 2.5mm)


Note 1: Contact max current = 10A

Note 3: S.D. Input signal range = +5 ~ +12V


Front View

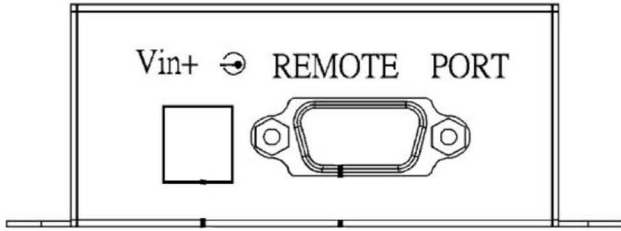


Rear View

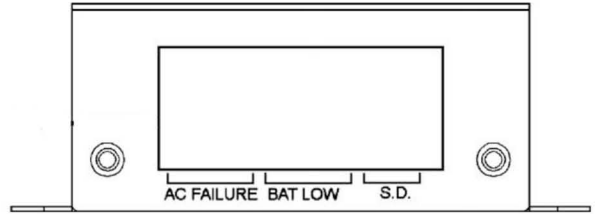

Top View

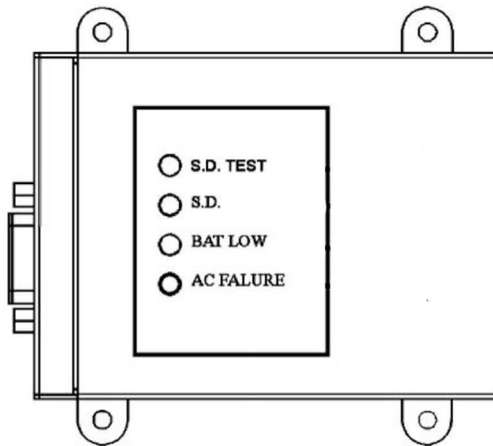

Dry Contact Pinout Information

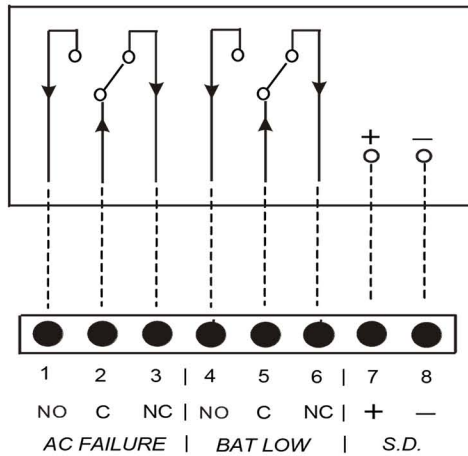

Part Number: TASR-EXTL-01



2538 E. 54th Street
Huntington Park, CA 90255
Office: 310-689-2328
Fax: 310-689-2329
sales@marathon-power.com
info@marathon-power.com
www.marathon-power.com

Your local representative / distributor is